

Installation Instructions

Ford Ranger (2015+) PX2



Step

Instructions

1

Remove left & right A/C vents



2

Remove lower left & right plastic trim pieces




3 Remove large central plastic piece (Be careful not to bend this part in the middle)



4 Remove and unplug lower piece with 12V auxiliary jacks




5 Remove 3 screws

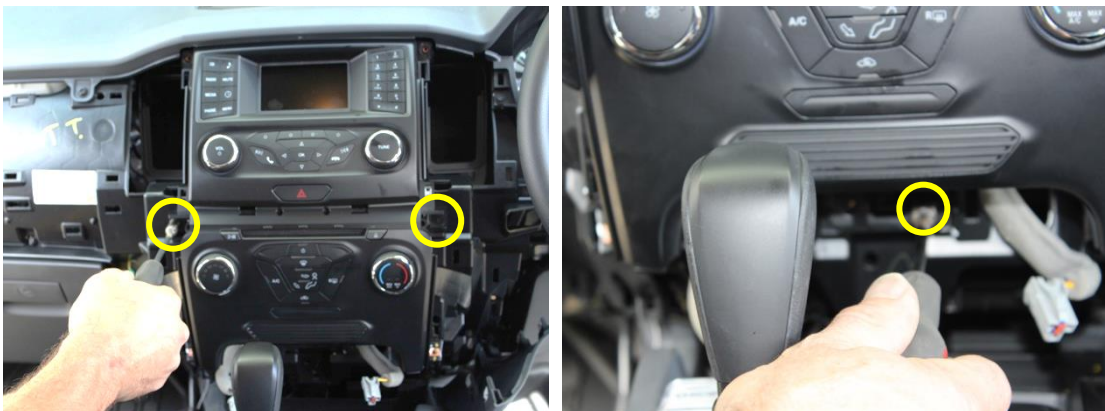


6 Remove & unplug entire front fascia



7 Locate left & right side brackets behind CD player flanges. Tighten 4 screws

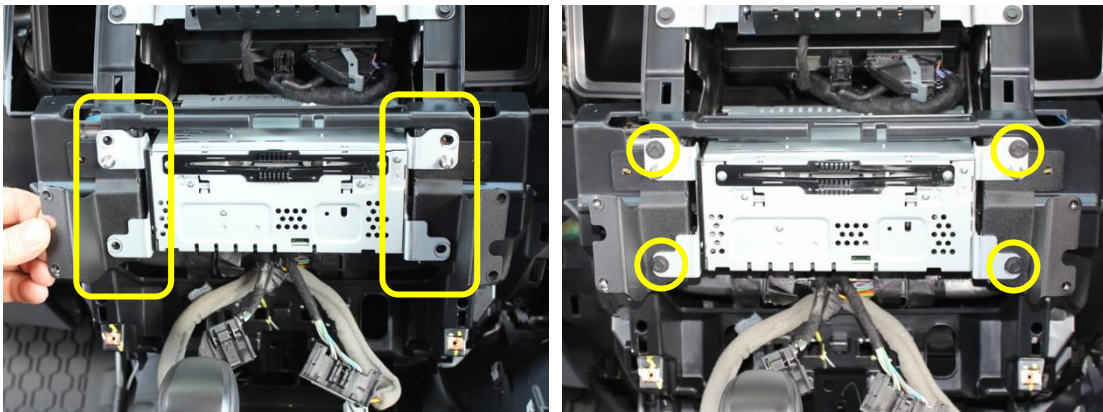

8 Measure & cut 55mm off the side tabs. Careful not to scratch or damage the front of the console

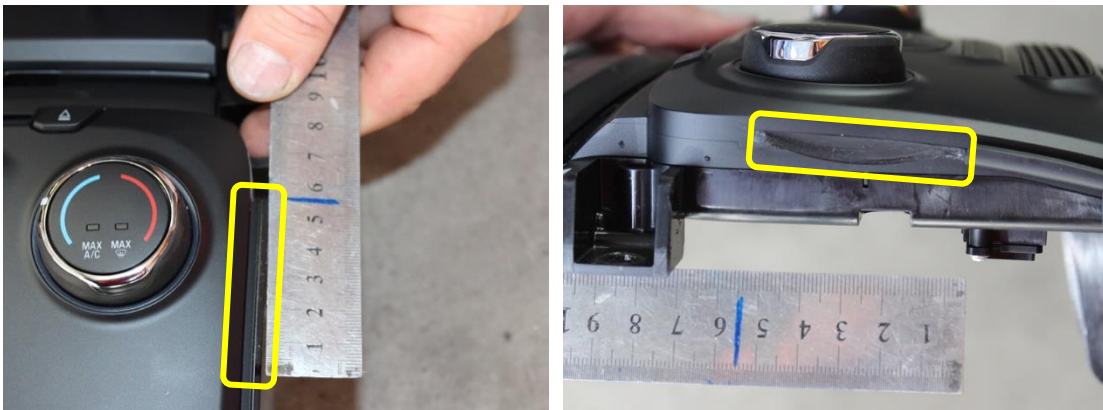

- 9 Plug in and replace centre console. Reinstall all parts following Steps 1-5 in reverse order



- 10 Screw in front bracket of In Dash Mount



If you have any issues or questions, please contact us.
Industrial Evolution