

Installation Instructions

Isuzu D-Max (2021+)



STEP

1

INSTRUCTION

Carefully loosen, then remove, the display unit.







2

Unplug display unit.





3

Remove plastic clips from the dash as shown.

Then, attach them to prongs on the rear of the display unit



4

Remove 6 x screws on rear of display unit.



5

Secure L + R brackets as shown, and fix into place by reattaching vents and screws removed in previous step.



6

Using a sharp blade, carefully trim 2mm of plastic underside of the dash unit as indicated.




PRODUCT DESIGN SOLUTIONS • EQUIPMENT & BRACKET DESIGN • ELECTRONIC PRODUCT DESIGN • PROTOTYPES • CAD DESIGN & ENGINEERING



7

Remove 4 x screws from dash as shown.

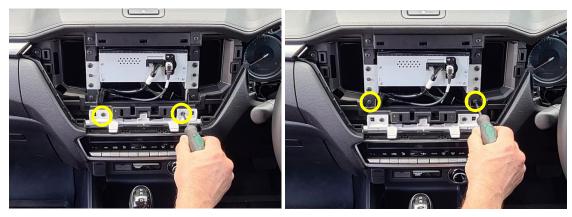


8

Install bracket as shown, securing with previously removed 4 x screws.



9

Using a sharp blade, carefully trim 2 x plastic extrusions as shown.

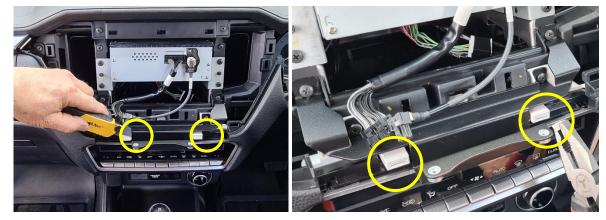



10

Return all components to their original locations.



Enjoy your new InDash Mount!



If you have any issues or questions, please contact us.