

## Installation Instructions

RAM 2500 (2023+)



STEP

INSTRUCTION

1

Remove upper dash rubber piece, then remove 2 x screws underneath.  
 Carefully loosen display unit as shown, unplug rear cables, then set aside display unit.



2


Remove 4 x dash screws. Remove dash piece as indicated.



- 3 Remove 2 x indicated dash screws, then install lower bracket in place using the 2 x screws. Return previously removed dash piece.



- 4 Install left and right side brackets, using 4 x dash screws and 2 x provided self tapper screws.

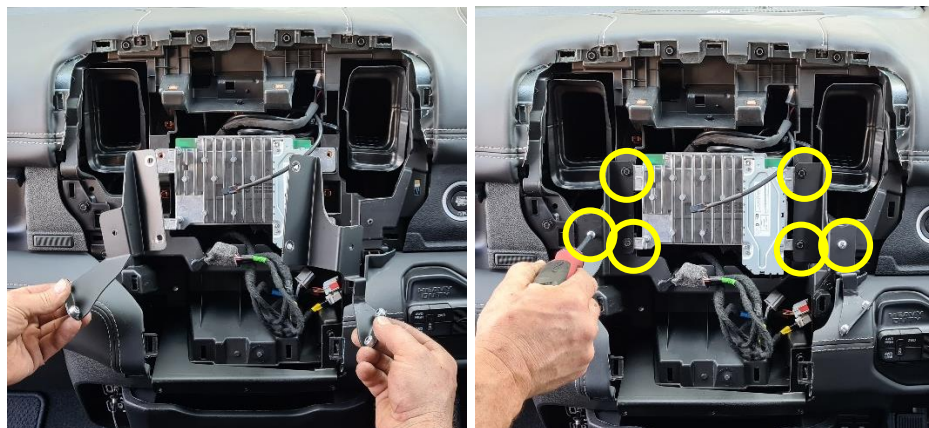

- 5 Replug cables to the display unit and return to the dash.

If necessary for fitment, using a sharp blade carefully shave internal dash plastic from the underside of the display unit. Being careful not to damage the externally visible dash.



6

Return 2 x upper dash screws and rubber piece.



7

Install front bracket using 7 x countersunk screws provided.



Enjoy your new InDash Mount!

If you have any issues or questions, please contact us.