

Installation Instructions

Toyota Kluger (2013+)



Step

Instructions

1

Carefully tilt lower control panel forward



2

Remove control unit screws



3

Carefully remove thin strip



4

Remove both air vents




5

Remove and unplug centre console



6

Unscrew console brackets

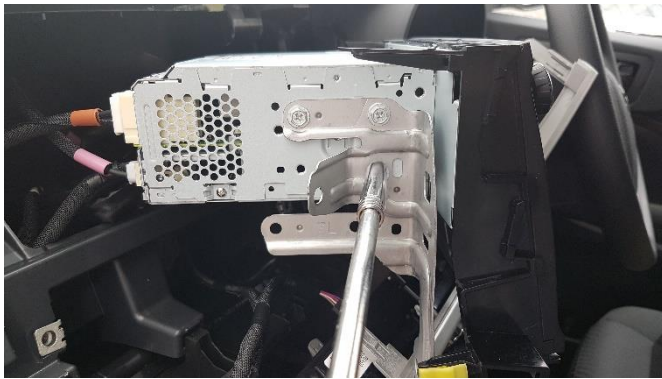

7

Move centre console aside to trim plastic

Cut plastic lip as required on both sides of the console to fit around side brackets



8

Fit both side brackets to centre console

Affix with metal plate and screws



9

Re-install centre console, including all wires



10

Re-install air vents, thin strip and lower panel



11

Install dash bracket with 4x countersunk M5 screws provided



Enjoy your new In Dash Mount!



If you have any issues or questions, please contact us.

Industrial Evolution.