

## Installation Instructions

Toyota Rav4(2013+)



Step

Instructions

1

Remove fascia panel above stereo




2

Remove vent from both sides of the head unit



3

Unclip and unplug the clock assembly

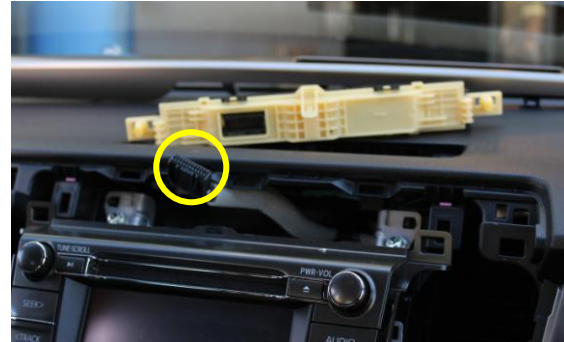

4

Unscrew the bolts securing the radio (both sides)




5

Lift out the radio and loosen the A/C control panel.



- 6 Locate and install the side brackets either side of the A/C control unit

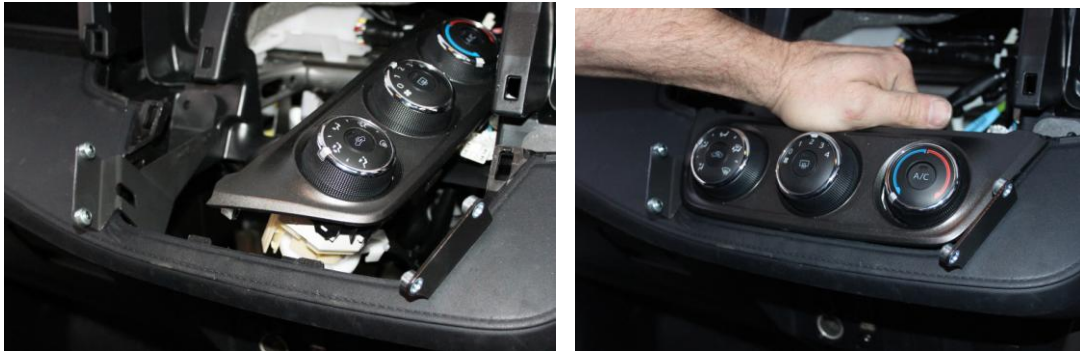

- 7 Replace the A/C unit and radio then re-insert the bolts



- 8 Re-install the air vents either side of the radio unit



- 9 Reconnect and click the clock back into place. Attach the trim panel above.



- 10 Align and screw the dash bracket into the side brackets using the four black countersunk screws supplied. The dash mount has now been successfully installed.



If you have any issues or questions, please contact us.  
**Industrial Evolution**